

# SOLTIS® 92

WIDTH: 177 cm

WEIGHT: 420 g/sqm



HOOK-OUT BLINDS



FACADE BLINDS




G U A R A N T E E S A N D L A B E L S



## ADVANTAGES

- FERRARI PRÉCONTRAINTE® TECHNOLOGY
- TEAR STRENGTH WITHOUT ANY REINFORCEMENT
- LOW SPACE REQUIREMENT
- NO BAGGING OR SAGGING
- WEATHER- AND DIRT- RESISTANT
- THE BEST SUN PROTECTION
- CUTS OUT DAZZLE TO ENSURE GOOD VISIBILITY
- METALLISED AND IRIDESCENT FINISHES
- 47 COLOURS: PLEASE CONSULT OUR COLOUR SAMPLE CHART

## COLOURS AND REFERENCES (COLOURS GIVEN FOR INDICATION)

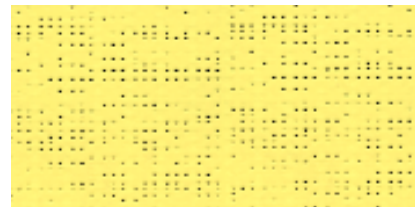

Ref. 92-2013

Ref. 92-2001	Ref. 92-2031
Ref. 92-2002	Ref. 92-2032
Ref. 92-2003	Ref. 92-2035
Ref. 92-2004	Ref. 92-2037
Ref. 92-2005	Ref. 92-2039
Ref. 92-2006	Ref. 92-2040
Ref. 92-2007	Ref. 92-2042
Ref. 92-2008	Ref. 92-2043
Ref. 92-2009	Ref. 92-2044
Ref. 92-2010	Ref. 92-2045
Ref. 92-2011	Ref. 92-2046*
Ref. 92-2012	Ref. 92-2047
Ref. 92-2014	Ref. 92-2048
Ref. 92-2016	Ref. 92-2051*
Ref. 92-2019	Ref. 92-2053
Ref. 92-2020	Ref. 92-2065
Ref. 92-2021	Ref. 92-2069
Ref. 92-2022	Ref. 92-2070
Ref. 92-2023	Ref. 92-2072
Ref. 92-2024	Ref. 92-2074*
Ref. 92-2025	Ref. 92-2088
Ref. 92-2027	Ref. 92-2089
Ref. 92-2030	Ref. 92-2090

\* Different colour on reverse side

## TECHNICAL CHARACTERISTICS

TECHNICAL CHARACTERISTICS	SOLTIS® 92	
WEIGHT	420 g/sqm	EN ISO 2286-2
THICKNESS	0.45 mm	
WIDTH	177 cm	
TENSILE STRENGTH (WARP/WEFT)	310/210 daN/5 cm	EN ISO 1421
TEAR STRENGTH (WARP/WEFT)	40/20 daN/5 cm	DIN 53.363
FLAME RETARDANCY	<b>M1/NFP 92.503 - B1/DIN 4102 - BS 7837 -</b> <b>M1/UNE 23727-90- ONORM B 3800 - CLASS 1/CSE 3/77 -</b> <b>SN 198 898 - NFPA 701 - T19 - ASTM E 84-95 - AS 1530</b>	
QUALITY MANAGEMENT SYSTEM	ISO 9000	

The technical characteristics shown are average values given as a guide and may be modified.

# FERRARI

